

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2002-359113
(43)Date of publication of application : 13.12.2002

(51)Int.Cl.

H01F 10/14

B32B 15/08

H01F 1/18

(21)Application number : 2001-276459

(71)Applicant : TDK CORP

(22)Date of filing : 12.09.2001

(72)Inventor : KAYA GASHIYO
CHO TSUTOMU
WAKAYAMA KATSUHIKO
HASHIMOTO YASUO
YAMASHITA SHINICHI
ISHIKAWA HIROYASU

(30)Priority

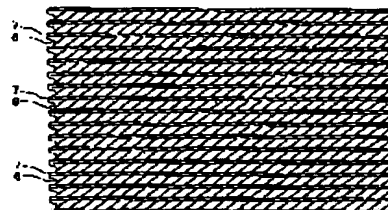
Priority number : 2001097125 Priority date : 29.03.2001 Priority country : JP

(54) SOFT MAGNETIC SHEET, LAMINATED SOFT MAGNETIC MEMBER AND ITS MANUFACTURING METHOD

(57)Abstract:

PROBLEM TO BE SOLVED: To provide a laminated soft magnetic member having superior permeability in a high-frequency band that exceeds 800 MHz even if the laminated soft magnetic member is set to 0.2 mm or less in thickness.

SOLUTION: A laminated soft magnetic member 5 comprises a laminate where a soft magnetic metal layer 7 having a thickness of 1 μ m or less and an insulating layer 6 are laminated alternately, and has an entire thickness of 0.2 mm or less. In the laminated soft magnetic member 5, permeability in a high-frequency band exceeding 800 MHz is excellent, thus preferably using the laminated soft magnetic member 5 as an SAR countermeasure member for putting onto a cellular phone.

**LEGAL STATUS**

[Date of request for examination]

25.11.2002

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office